

MB118VP-B



Scan the QR code for more product information

Copyright © ICY DOCK International. All Rights Reserved. 650303 VER 1.0



Cremax Europe GmbH
Email: support@icydock.com
Weidenweg 21H, 47059 Duisburg, Germany




Beyond Technologies UK Ltd
Email: info@beyondtech.co.uk
Unit B6, Halesfield 11, Telford, Shropshire, TF7 4PH, U.K.

1


Package Contents • Packungsinhalt • Contenu • Contenido del paquete
• 包装について • 包装説明 • 包装说明




Device



User Manual



Drive ID Plugs



10 x M3*2.5 Pan Head Screw
for Device
(2 x Screw for Spare Parts)




14 x M3*4 Flat Head Screw
for 2.5" SSD
(2 x Screw for Spare Parts)

⚠ **Note:** Please use the included screws to secure the device & drives

2


Device Information • Geräteinformationen • Informations dispositif
• Información del dispositivo • 本体説明 • 機體説明 • 机体说明

▼ Front View

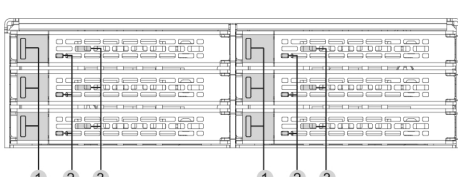

- 1 Drive Tray Ejection Button
- 2 LED Indicator (Power : Solid Green ; Drive Access : Flashing Green)
- 3 Slot for Drive ID Plug

▼ Rear View

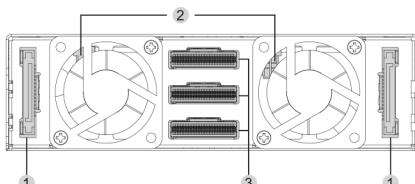


- 1 15 Pin SATA Power
- 2 3 Pin Fan Header Port
- 3 SlimSAS 8i Connector (SFF-8654)


3

Installation Guide • Installationsanleitung • Guide d'Installation • Guía de instalación
• 製品の組み込み手順について • 操作步驟 • 操作步驟


3-1




3-2



3-3




3-4




Remove the ABS support bracket by unscrewing 2 x M3*4 flat head screws and keep the screws for drive mounting purposes (3-6).

3-5




The tray accommodates U.2/U.3 NVMe drives up to 9.5mm in height.

3-6




Align the four screw holes to the drive and use the included M3*4 screws to install.

3-7




(Optional)



Insert the drive ID plug into the slot, according to your preference.

4

Device Installation • Installation eines Gerätes • Installation du dispositif
• Instalación del dispositivo • デバイス取付手順 • 装置安裝步驟
• 设备安裝步驟

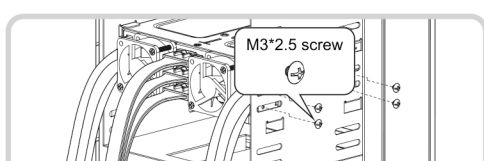

- 1. Insert the device into external 5.25 bay and use the included M3*2.5 screws to secure the device.
- 2. Connect 15 Pin SATA power and SlimSAS cables to the device to finish installation.

